



Search our Literature, Images, Videos, or DirectAccess

ES2632

Electric Scissor Lift



Key Specs

- **Platform Height:** 25 ft 6 in. / 7.77 m
- **Platform Capacity:** 507 lb / 229.97 kg
- **Machine Width:** 2 ft 8 in. / 0.81 m
- **Drive Speed - Platform Lowered:** 3 mph / 4.83 km/h

Power Source

Batteries	4 x 6V 220 amp-hr
Charger	27 amp High Frequency Charger

General

Brakes	Multi-disc Friction
Capacity - Hydraulic Reservoir	3.2 gal. / 12.11 L
Hydraulic Pump	Fixed Displacement Gear
Machine Weight	4400 lb / 1995.81 kg
Maximum Ground Bearing Pressure	94 psi / 6.58 Kg/cm2

Performance

Drive Speed - Platform Elevated	0.5 mph / 0.80 km/h
Drive Speed - Platform Lowered	3 mph / 4.83 km/h
Drive System	24V DC
Gradeability	25 %
Lift Time	32 sec.
Lower Time	24 sec.
Maximum Drive Height	25 ft 5 in. / 7.75 m
Platform Capacity	507 lb / 229.97 kg
Platform Capacity - Extension	265 lb / 120.20 kg
Platform Capacity - Indoor	507 lb / 229.97 kg
Platform Capacity - Outdoor	275 lb / 124.74 kg
Turning Radius - Inside	0 in. / 0 m
Turning Radius - Outside	7 ft 4 in. / 2.24 m

Dimensional Data

Ground Clearance	4 in. / 0.1 m
Machine Height	7 ft 4 in. / 2.24 m
Machine Height - Rails Folded	5 ft 10 in. / 1.79 m
Machine Length	7 ft 10 in. / 2.4 m
Machine Width	2 ft 8 in. / 0.81 m
Platform Extension Length	2 ft 10 in. / 0.86 m
Platform Height - Lowered	3 ft 8 in. / 1.11 m
Platform Railing Height	3 ft 8 in. / 1.11 m
Platform Size	25.4 x 84in
Tire Size	16 x 5 in., Non-marking
Wheelbase	6 ft 2 in. / 1.88 m

Reach Specifications

Platform Height	25 ft 6 in. / 7.77 m
Platform Height (Indoor)	25 ft 5 in. / 7.75 m
Platform Height (Outdoor)	21 ft / 6.40 m
Working Height	31 ft 6 in. / 9.6 m

Key Features

- Run Longer on a Single Charge: Delivers double the battery life*
- Work in Sensitive Areas: Available CleanGuard leak containment system allows for work on sensitive flooring
- Reduce Operating Costs: Electric drive and integrated components with reduced hydraulic components on the entire machine lower the chances for leaks and service calls to keep you on the job longer
- Increase Your Maneuverability: Narrow width fits through most standard doorways and tight aisles

*Compared to a competitive model under similar test conditions. Actual results may vary.


Options



SkySense™



CleanGuard™



JLG® Mobile
Control



Scissor Lift Pipe
Racks

Literature

[AWP Reference Guide](#)

[Electric Powered MEWP
Brochure](#)

[ES Series Spec Sheet
A92.20 Compliant](#)

[Manuals](#)

Looking for Pre-ANSI A92.20 Spec Sheets?

[Click Here](#)

Stay Connected

✉ Subscribe to our E-news

[Home](#) > [Equipment](#) > [Scissor Lifts](#) > [Electric](#) > [ES Series Scissor Lifts](#) > [ES2632](#)

QUICK LINKS

SIGN IN


CONTACT



JLG Industries, Inc. is the world's leading designer, manufacturer and marketer of access equipment. The Company's diverse product portfolio includes leading brands such as JLG® mobile elevating work platforms; JLG and SkyTrak® telehandlers; and an array of complementary accessories that increase the versatility and efficiency of these products. JLG is an Oshkosh Corporation Company [NYSE: OSK].



Copyright © 2021 JLG Industries
[Terms of Use](#) | [Contact Us](#) | [Privacy Policy](#)

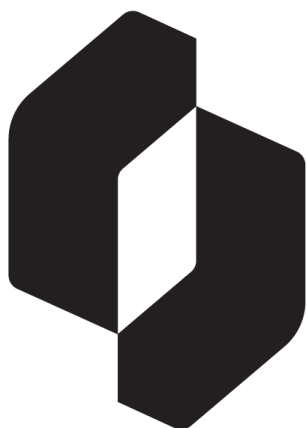

OSHKOSH™